HSF

NOTES:
Rated Current:20 AMP
Rated Voltage:300 V
Contact Resistance:8 mΩ max
Withstand Voltage:2500 V AC/DC
Insulation Resistance:1000 MΩ min
Operation Temperature:-40℃ to +105℃
Screw Torque:0.50 N-m
Wire Range:30~12 AWG

Screw Material:Steel
Pin Block Material:Brass
Cite Feet Material:Brass
Cite Feet Plating:Matte Tin Plated Over Nickel
Insulator Material:PA66 UL94 V-0

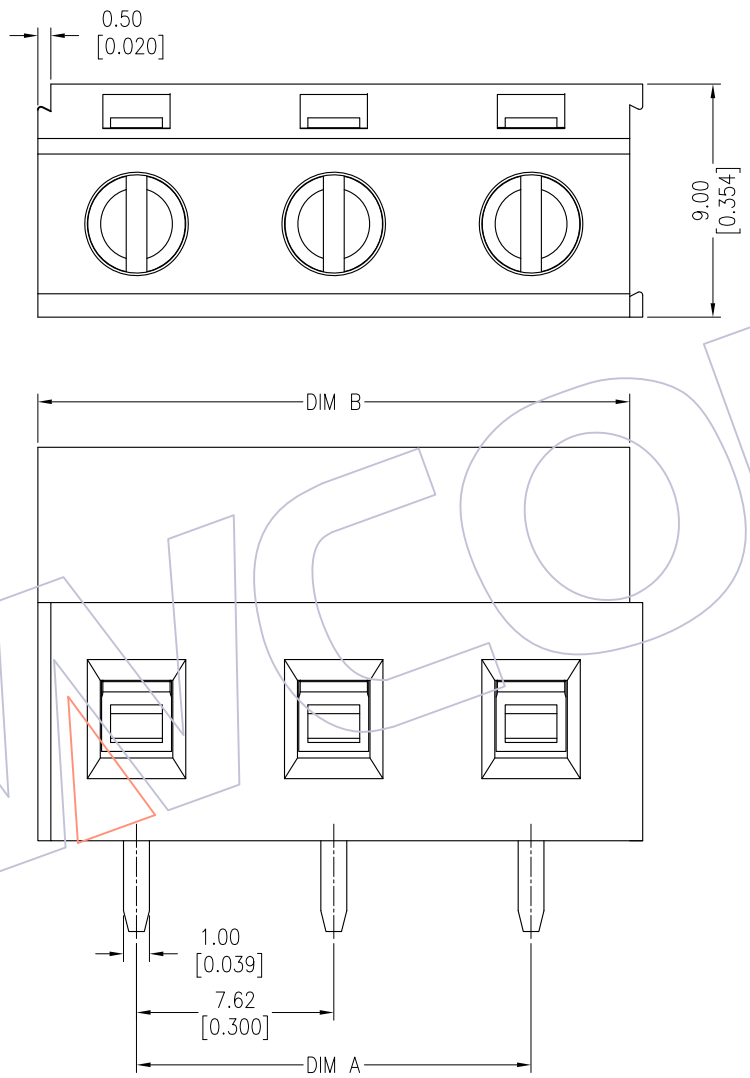

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

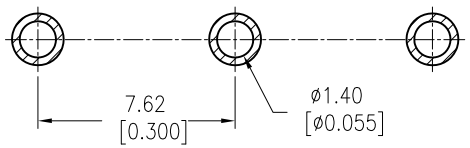

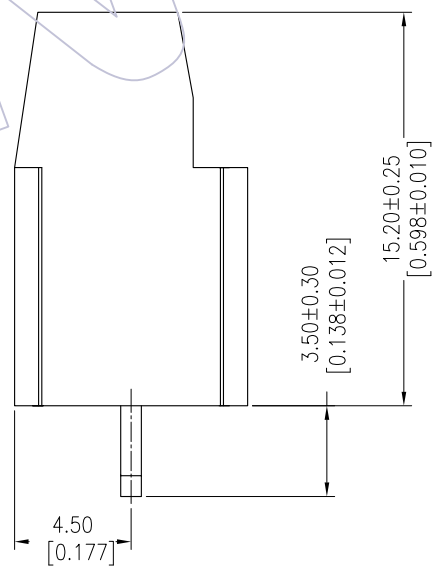

Ordering Information:

E H 762 - 152 S XX X SM 1

- 762: Picth 762=7.62
- 152: Housing High 152=15.20
- XX: No.of Pins 02-03P
- X: Color A=Green G=Grey U=Blue
- SM: Contact Plated SM=Matte Tin

3P	15.24	22.86
2P	7.62	15.24
PIN	A	B

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2014/01/03	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Tsingsn	DATE	2014/01/03
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm / inch
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. EH762-152SXXXSM1

TITLE: 7.62mm Pitch Euro Terminal Blocks

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com